

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 August 2003 (21.08.2003)

PCT

(10) International Publication Number
WO 03/069552 A1

(51) International Patent Classification⁷: G06K 19/077,
G09F 3/02

Mikko [FI/FI]; Mustanlahdenkatu 12 B 29, FIN-33210
Tampere (FI).

(21) International Application Number: PCT/FI03/00062

(74) Agent: GUSTAFSSON, Helmer; UPM-Kymmene Cor-
poration, P.O. Box 40, FIN-37601 Valkeakoski (FI).

(22) International Filing Date: 28 January 2003 (28.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20020296 14 February 2002 (14.02.2002) FI

(81) Designated States (*national*): AE, AG, AI, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): RAFSEC
OY [FI/FI]; P.O. Box 53, FIN-33101 Tampere (FI).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): TIRKKONEN,

[Continued on next page]

(54) Title: SMART LABEL

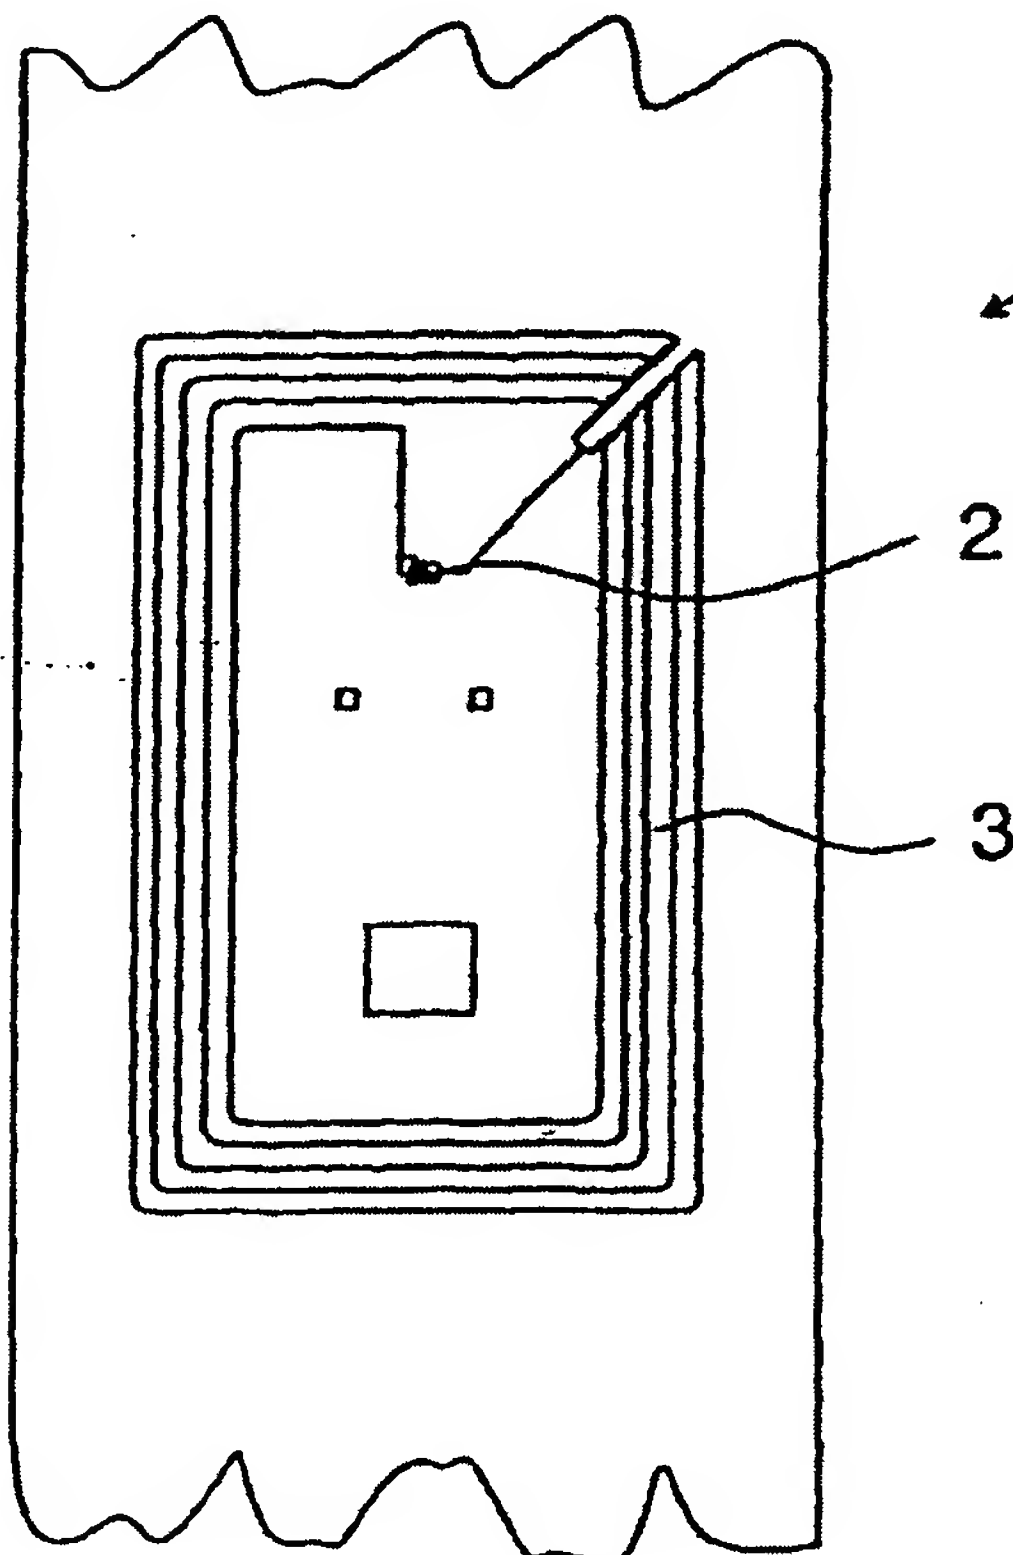

(57) Abstract: The present invention relates to
smart label including a polyolefin substrate com-
prising a circuitry pattern and an integrated cir-
cuit on a chip. The substrate comprises 30 - 80
wt-% of a mineral filler.

BEST AVAILABLE COPY

WO 03/069552 A1

WO 03/069552 A1



SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG)

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:
with international search report

Smart label

The present invention relates to a smart label including a polyolefin substrate comprising a circuitry pattern and an integrated circuit on a chip. The present invention also relates to a moulded polyolefin product comprising an in-mould smart label including a polyolefin substrate comprising a circuitry pattern and an integrated circuit on a chip.

Smart labels comprising a circuitry pattern and an integrated circuit on a chip are used for example for identifying and following certain products. They form an easy and cheap surveillance system if a reader device is available.

On the other hand, there is a need for labels which can be put inside a product or on a surface of the product during a moulding process to obtain identifiable products from which the smart label cannot be removed without breaking the product. The normally used raw materials for in-mould labels are biaxially oriented polypropylene (BOPP), high density polyethylene (HDPE) and low density polyethylene (LDPE) because it is advantageous to use the same material in the label as in the moulded product due to the possibility of recycling. The most common raw materials used in moulded products, especially in food, beverage, flower, petrochemical, personal hygiene or household product industries, are polyolefins, such as high density polyethylene (HDPE) and polypropylene (PP). In this context the moulding process refers to moulding processes known as such, for example an injection moulding process or a blow moulding process.

There are, however, certain obstacles for manufacturing such smart labels which can be used in in-mould products. The attachment of the chip to the circuitry pattern may require high temperatures, and therefore films which are normally used as a substrate for in-mould labels cannot be used. The required temperature may be 150 - 180°C, and the duration of the treatment may be 5 - 8 seconds. It means that the normally used films melt, burn or shrink. For example polyester would have a high enough thermostability but it cannot be used with polyolefins because products made of polyolefins shrink approximately

2 % after moulding and polyester maintains its dimensions. Further, the adhesion of the polyester film to polyolefins is not perfect either, and recycling is not possible when a film with a different raw material basis is used.

5

The present invention brings an enhancement to the known technique. The smart label and the in-mould product of the invention is characterized in that the substrate comprises 30 – 80 wt-% of a mineral filler.

10

The films of the invention contain mineral fillers to enhance the heat resistance of the film. The films contain 30 – 80 wt-% of a mineral filler, such as talc, chalk, calcium carbonate (CaCO_3), titanium dioxide (TiO_2), silica, or mixtures of these. The preferred mineral filler content is 15 50 – 70 wt-%. The film can be manufactured for example by casting or blowing. It can be non-oriented, machine direction oriented, cross direction oriented or biaxially oriented. The film may contain more than one layer, and it may be coated on one side or both sides. Its appearance may be matt or glossy, and it may be translucent or 20 opaque. Its colour may be anything. Its thickness is preferably 30 – 250 μm .

25

In the present application, smart labels refer to labels comprising an RF-ID circuit (identification). A smart label web can be formed of the film of the invention in a continuous process. The smart label web is a web that is flexible but still has a suitable rigidity. The smart label web consists of a sequence of successive and/or adjacent smart labels. The circuitry pattern can be manufactured by printing the circuitry pattern with an electroconductive printing ink on a film, by etching the circuitry 30 pattern on a metal film, by punching the circuitry pattern from a metal film, or by winding the circuitry pattern of for example copper wire. Typically the circuitry pattern is formed by etching it on the metal film. The electrically operating RFID (radio frequency identification) circuit of the smart label is a simple electric oscillating circuit (RCL circuit) 35 operating at a determined frequency. The circuit consists of a coil, a capacitor and an integrated circuit on a chip. The integrated circuit comprises an escort memory and an RF part which is arranged to

3

communicate with a reader device. Also the capacitor of the RCL circuit can be integrated in the chip or it can be located outside the chip. When the capacitor is located outside the chip, it is formed by plates on the smart label web and the structural part. The plates are
5 located one upon the other thereby forming the capacitor in a ready smart label.

Methods for attaching the integrated circuit on the chip to a circuitry pattern include the flip-chip technology which comprises several tech-
10 niques. The flip-chip technology can be selected from a large variety in such a way that the production rate of the process can be maximized at an appropriate level of quality and reliability. Suitable flip-chip methods include anisotropically conductive adhesive or film (ACA or ACF) joint (the required process temperature $>140^{\circ}\text{C}$), isotropically conductive
15 adhesive (ICA) joint (the required process temperature $>140^{\circ}\text{C}$), non-conductive adhesive (NCA) joint (the required process temperature $>140^{\circ}\text{C}$), solder flip-chip (FC) joint (the required process temperature approximately 220°C), or possibly other metallic joints. In addition to the flip-chip technology, also a wire bond or a joint made by tape
20 automated bonding (TAB) can be used. Also joints made by polymer based thermoplastic adhesives can be used (the required process temperature $140 - 200^{\circ}\text{C}$). The chip can also be placed by the flip-chip technology onto a separate structural part which is attached to the circuitry pattern.

25 The smart labels of the invention can be delivered to be used as in-mould labels in a web form with or without a backing film. The web may be perforated. When the web has the backing film it is preferably a non-adhesive dry-peel film on which the die-cut smart labels are
30 located. The web can be in roll form or fan folded. It is also possible that the web is sheeted to sheets containing one or more smart labels.

On the smart label web, the chip can be plain or it can be covered by a film which protects the chip and the circuitry pattern against moisture
35 and chemicals. The protective film may be for example a coextruded film based on polyolefins. The thickness of the film is preferably $10 - 200\text{ }\mu\text{m}$. Another possibility is to adhere a layer of a shock-absorbent

rubber compound. The smart label may be inserted on the surface of the product with either the front or the reverse side in contact with the product, or the smart label may be embedded in the product.

- 5 When a blow moulded product is in question, the reverse side of the smart label web shall include an adhesion layer whose melting point is lower than that of the smart label substrate because the blow moulding process takes place at a lower temperature than injection moulding. Thus, to achieve a good adhesion, an extra layer is required. The
10 smart label made by the blow moulding process is attached to the product so that the adhesion layer faces the moulded product, or the smart label may be embedded into the product.

- 15 In the following, the invention will be described by means of a drawing. Fig. shows a single smart label in a top view.

- Figure 1 shows a single smart label in a top view. The smart label web 1 is a continuous web which contains circuitry patterns 3, each having an integrated circuit on a chip 2, at suitable spaces one after another and/or next to each other. The material of the web is polyolefin containing 30 – 80 wt-% of a mineral filler. The circuitry pattern 3 can
20 be made by printing the circuitry pattern on a film with an electro-conductive printing ink, by etching the circuitry pattern on a metal film, by punching the circuitry pattern off a metal film, or by winding the circuitry pattern of e.g. a copper wire. The circuitry pattern is provided
25 with an identification circuit, such as a radio frequency identification (RFID) circuit. The identification circuit is a simple electric oscillating circuit (RCL circuit) tuned to operate at a defined frequency. The circuit consists of a coil, a capacitor and a circuit integrated on a chip, consisting of an escort memory and an RF part for communication with a
30 reader device. The capacitor of the RCL circuit can also be integrated on the chip or the capacitor/s can be located outside the chip.

Example.

- 35 In-mould smart labels comprising a circuitry pattern and an integrated circuit on a chip were manufactured from commercial polyolefin films

comprising 30 – 80 wt-% of a mineral filler. The used films were FPO® films 3966, 3969, 3970 and 3965 manufactured by RKW Sweden AB (Sweden), Leanfilm manufactured by Ecolean AB (Sweden) and Teslin® synthetic printing sheets SP-700, SP-800, SP-1000, SP-1400 and SP-1800 manufactured by PPG Industries, Inc. (USA). The FPO® films were polypropylene films whose thickness varied from 70 to 110 µm, the filler was a combination of chalk and talc and the filler content was 51 wt-% according to ISO 3451-1. These films resist well temperatures of at least 160°C. All the films sustained well the manufacturing process of the smart label and its moulding into a product.

The invention is not restricted to the description above, but the invention may vary within the scope of the claims. The main idea in the invention is that the polyolefin substrate of the smart label can be made thermoresistant by a certain amount of mineral fillers.

Claims:

1. A smart label including a polyolefin substrate comprising a circuitry pattern and an integrated circuit on a chip, **characterized** in that the substrate comprises 30 – 80 wt-% of a mineral filler.
2. The smart label according to claim 1, **characterized** in that the mineral filler is talc, chalk, calcium carbonate (CaCO_3), titanium dioxide (TiO_2), silica or mixtures of those.
3. The smart label according to claims 1 or 2, **characterized** in that the polyolefin substrate is a biaxially oriented polypropylene (BOPP), a high density polyethylene (HDPE) or a low density polyethylene (LDPE).
4. A moulded polyolefin product comprising an in-mould smart label including a polyolefin substrate comprising a circuitry pattern and an integrated circuit on a chip, **characterized** in that the substrate comprises 30 – 80 wt-% of a mineral filler.

1/1

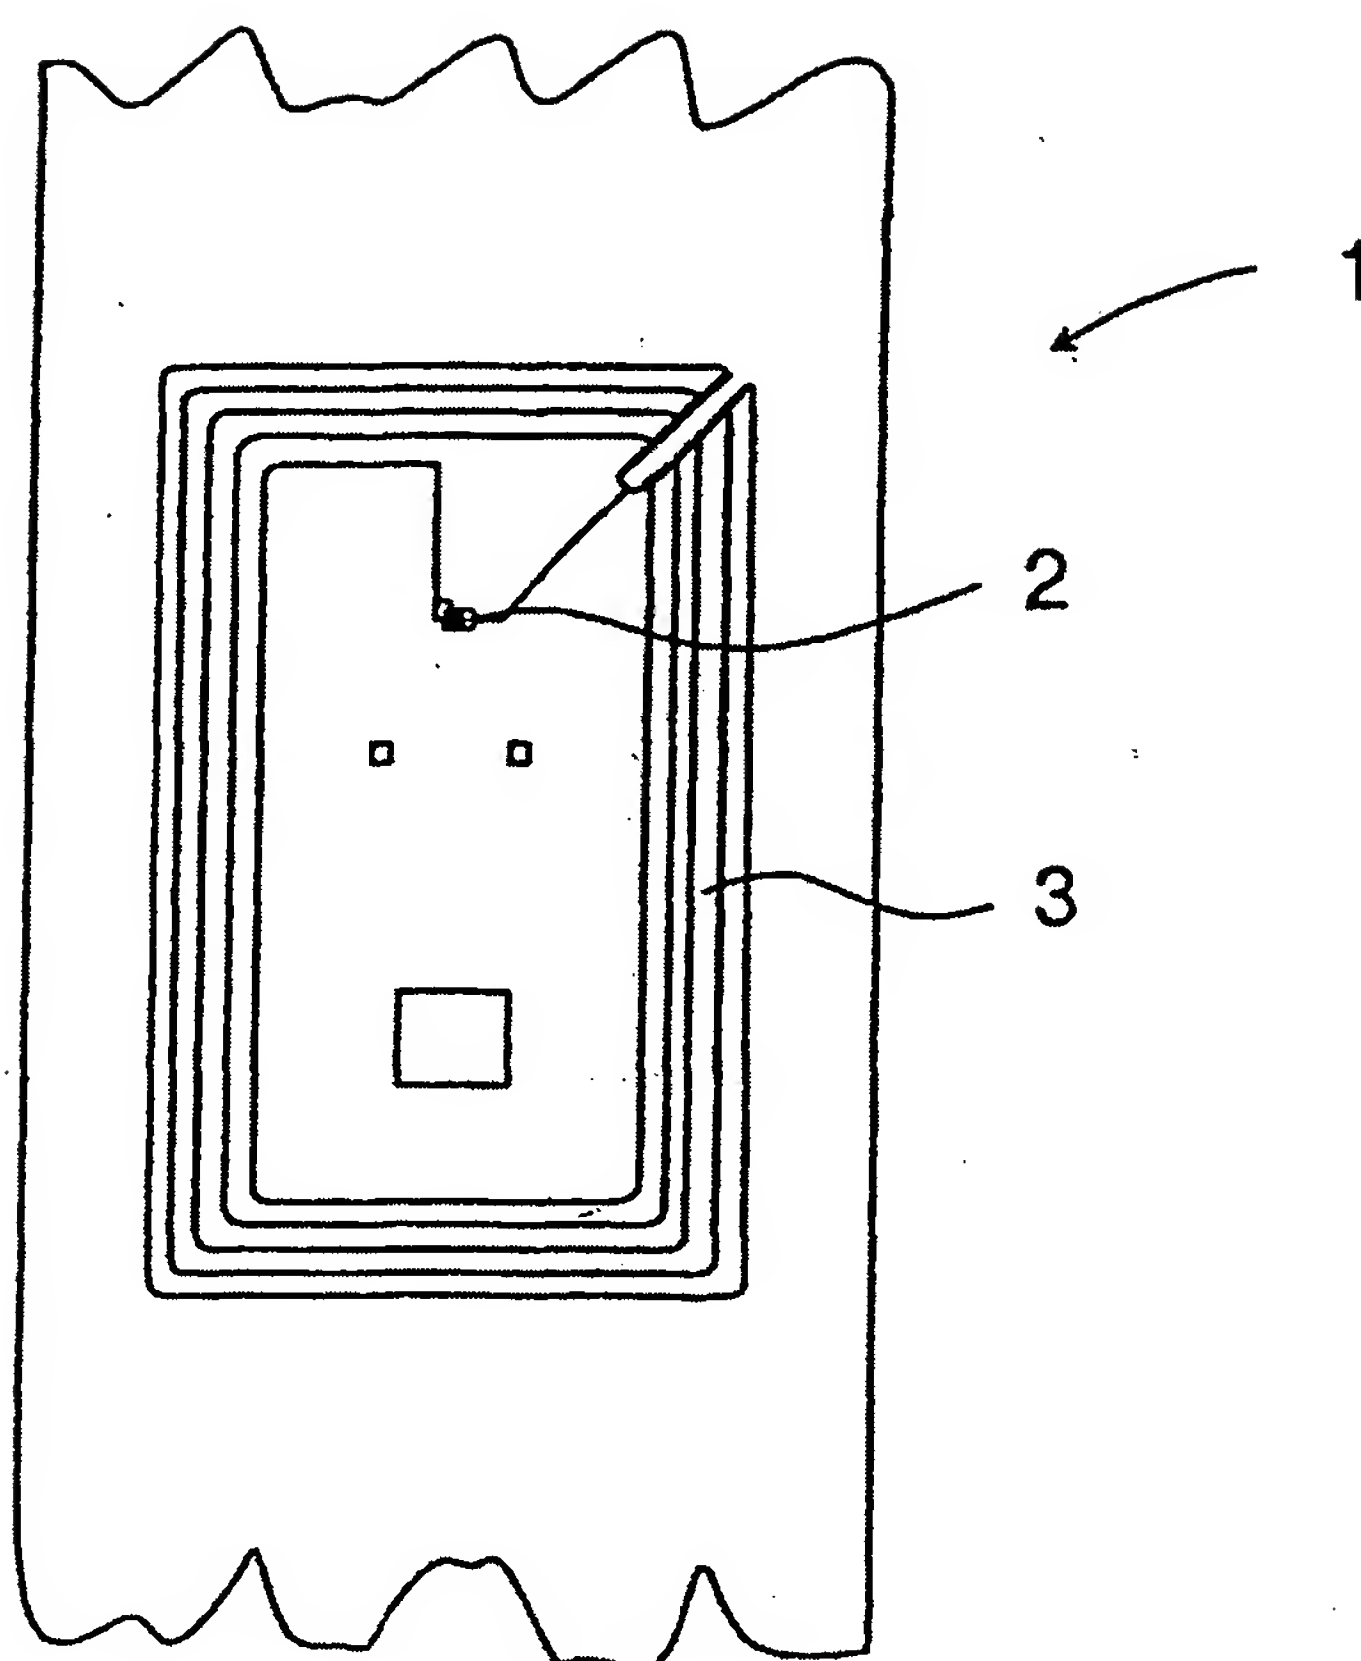


Fig. 1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 03/00062

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G06K 19/077, G09F 3/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B32B, G06K, G09F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 9714112 A1 (MOTOROLA INC.), 17 April 1997 (17.04.97), page 20, line 11 - line 15, abstract	1-4
	--	
Y	EP 0575631 A1 (ROTA-DRUCK W. KLESER KG), 29 December 1993 (29.12.93), column 3, line 6 - line 55, claims 1,11,12, abstract	1-4
	--	
A	EP 0922555 A1 (ALLIBERT EQUIPEMENT), 16 June 1999 (16.06.99), figures 1-5, abstract	1-4
	--	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

- * Special categories of cited documents
- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed
- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

27 May 2003

Date of mailing of the international search report

30 -05- 2003

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Anna Ahlander/Els
Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 03/00062

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1172761 A1 (CANON APTEX KABUSHIKI KAISHA), 16 January 2002 (16.01.02), column 1, line 7 - line 14; column 10, line 56 - column 11, line 24, figures 1,2, abstract --	1-4
A	US 5302431 A (MARVIN I. SCHULTZ), 12 April 1994 (12.04.94), column 2, line 10 - line 30; column 4, line 44 - line 49 --	1-4
A	US 6206292 B1 (BERND ROBERTZ ET AL), 27 March 2001 (27.03.01), column 1, line 13 - line 20; column 2, line 19 - line 25; column 2, line 59 - line 65, abstract -- -----	1-4

Form PCT/ISA/210 (continuation of second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT
Information on patent family members

29/04/03

International application No.
PCT/FI 03/00062

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	9714112	A1	17/04/97	AU	700340 B	24/12/98
				AU	7014496 A	30/04/97
				BR	9610948 A	12/01/99
				CA	2234686 A,C	17/04/97
				CN	1101037 B	05/02/03
				CN	1199482 A	18/11/98
				EP	0855064 A	29/07/98
				JP	11513518 T	16/11/99
				NZ	318619 A	29/06/99
				US	6040773 A	21/03/00
				US	6218942 B	17/04/01
				US	6252508 B	26/06/01
				US	6404339 B	11/06/02
				US	6411213 B	25/06/02
				US	2002093426 A	18/07/02
EP	0575631	A1	29/12/93	DE	4034430 C	17/06/92
EP	0922555	A1	16/06/99	AT	212281 T	15/02/02
				DE	69803542 D,T	14/08/02
				DK	922555 T	06/05/02
				ES	2172100 T	16/09/02
				FR	2770172 A,B	30/04/99
				PT	922555 T	31/07/02
EP	1172761	A1	16/01/02	JP	2002140679 A	17/05/02
				US	2002021330 A	21/02/02
US	5302431	A	12/04/94	CA	2086646 A,C	07/07/93
US	6206292	B1	27/03/01	AT	202428 T	15/07/01
				AU	1017300 A	27/07/00
				DE	59900131 D	00/00/00
				EP	1035503 A,B	13/09/00
				JP	2000222545 A	11/08/00
				SG	82064 A	24/07/01

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)